



M.M.E. AIR WINCHES
WAR-I SERIES
(500 to 3000kg)


VERSATILE AIR WINCHES



RELIABLE FAST EFFICIENT QUIET EASY MOUNTING

LIFTING YOUR WORLD

MME WAR-I series air winches are designed specifically for mining, construction, marine and general engineering applications. The compact design of the winches allows them to be installed quickly where required in any orientation. The winches have a factor of safety in excess of 5 at the rated load. Extended drum versions are available for increased rope capacity. They comply with the requirements of ASME B30.7. The manufacturing facility producing the winches is **ISO9001, ISO14001 & OHSAS18001** certified.

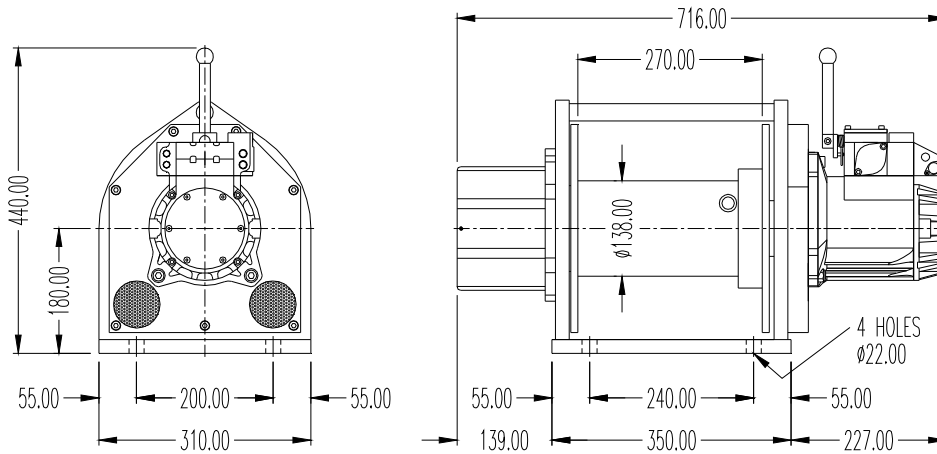

Management System
ISO 9001:2008

www.tuv.com
ID 9105085673

TECHNICAL SPECIFICATIONS @ 6 bar

Model	WAR500I	WAR1000I	WAR2000I	WAR3000I
Half Drum Line Pull (kg)	500	1000	2000	3000
Rope Speed at Rated Load (m/min)	28.10	13.90	6.70	4.60
Full Drum No Load Speed (m/min)	60.30	28.20	18.50	9.00
Air Consumption (m ³ /min)	4.0	4.0	4.0	4.0
Air Connection	G ³ / ₄	G ³ / ₄	G ³ / ₄	G ³ / ₄
Supply Hose (Inside Ø) (mm)	25	25	25	25
Sound Level (dB(A))	80	80	80	80
Recommended Rope Size (mm)	13.0	13.0	15.0	18.0
Rope Storage Length (m) – Standard Drum	80	80	59	52
Rope Storage Length (m) – Extended Drum	165	165	119	106
Weight without Wire Rope (kg) - Std	104	104	104	104
Weight without Wire Rope (kg) - Ext	144	144	144	144

FEATURES AND CHARACTERISTICS

- Load Limiter** : Integral load limiter which automatically prevents overloading of the winch. Load limiter is 100% repeatable at all working pressures and does not wear or generate damaging heat.
- Emergency Stop** : Winches can be supplied with an emergency stop device as an option. This shuts off the main air supply to the winch when activated.
- Precise Control** : Lever control and pilot pendent control offer variable speed control. Accurate and precise positioning of loads is standard for all models.
- Fail Safe Disc Brake** : Non-asbestos self adjusting disc brake is applied automatically when the air supply to the winch is shut off. The brake is self adjusting for the life of the brake and is capable of holding in excess of 125% of the working load limit.
- Integral Silencer** : The exhaust air silencer is built into the winch frame and limits the noise level to 80dB(A).
- Vane Motor** : Assisted vane lifting ensures maximum starting torque when starting under load.
- Sealed Gearbox** : The sealed planetary gearbox ensures that the most stringent duty cycles can be met. The gears are heat treated and mounted on high strength, low friction bearings.
- Ease of Maintenance** : The modular design of the winch allows easy access to internal components such as the motor, gearbox, brake, load limiter and drum assembly. Common parts are used throughout the range.

M.M.E. MANUFACTURING CO. (PTY) LTD
P.O. BOX 355 CARLETONVILLE 2500, SOUTH AFRICA
TEL: +27 (18) 788-6674/5/6 **FAX: +27 (18) 786-1479**
Email: info@mmelifting.com **Website: www.mmelifting.com**